OSELLA

THE BEST SOLUTION FOR AGRICULTURE

MISTBLOWER ATM 3PL

TECHNICAL FEATURES:

- HOT GALVANISED FRAME
- POLYETHYLENE TANK
- HAND WASHING TANK
- INTEGRATED SYSTEM CLEANING TANK
- DIAPHRAGM PUMP WITH VALVE
- REMOTE CONTROLLED PRESSURE REGULATOR
- HYDRAULIC AGITATOR
- SUCTION FILTER WITH ANTI-EMPTYING VALVE
- Ø 620 24" FAN WITH CENTRIFUGAL CLUTCH
- 9 ADJUSTABLE BLADES IN FIBREGLASS/NYLON
- TRANSMISSION WITH NEUTRAL
- STRAIGHTENING VANES
- 12 DOUBLE NOZZLES
- REAR BUMPER PROTECTION

SUITABLE FAN: Ø 720 -28"

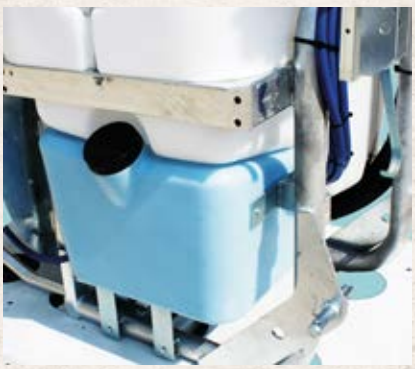

www.osellasrl.it

ACCESSORIES ON REQUEST

ELECTRIC PRESS. REGUL.

HYDR. POWDER MIXER ASSEMBLY ON THE FILTER

TANK RINSING NOZZLE KIT

LIGHTING LED KIT

LOW VOLUME KIT

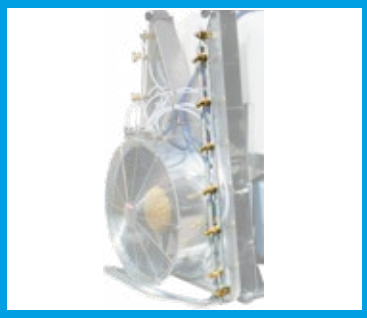

ADJUSTABLE DOUBLE ANTIDRIP BRASS NOZZLES

Mistblower brought to the third point, suitable for treatments on crops with small/medium planting density. Thanks to its compact size and high-performance fan, it can be used for the precise treatments uniform and symmetrical of espalier cultivation both in hilly and plain areas.The 3PL ATM Mistblower stands out for the quality of its components, its sturdy frame, and the possibility of configuring it with numerous accessories in full compliance with safety regulations and the protection of the environment.Fitted with 620- and 720-mm fan made entirely in Italy.

Advantages are targeted distribution, increased vegetation penetration, excellent symmetry of the treatment, considerable reduction of drift obtaining a quality treatment.The 9 fan blades are in composite material and can be adjusted in three different angles to adapt the unit to the power of the available tractor. The linear fans are equipped as standard with a metal centrifugal clutch with a ferodo and a fixed rectifier at the air outlet that provides for a better air distribution. About groups are fitted with multipliers at a neutral speed and point.

Mistblowers are configurable with a wide range of high-pressure pumps.
Available in the 200, 300, 400, 500, 600 litre version

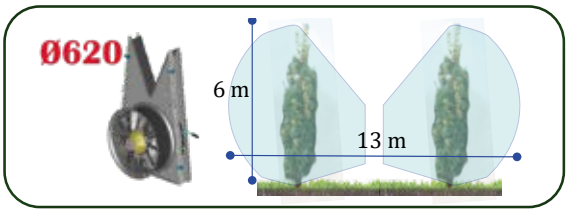

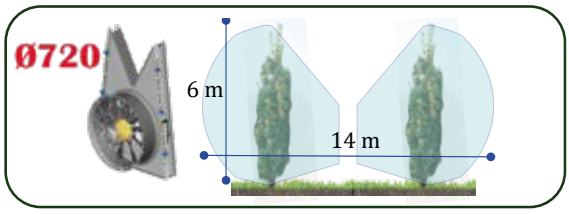

200 Lt.	Ø620	55Lt/min	1+N	≥ 40 Cv	L=90cm P=120cm H=130cm	195 Kg.
300 Lt.	Ø620	55Lt/min	1+N	≥ 40 Cv	L=100cm P=130cm H=130cm	205 Kg.
400 Lt.	Ø620 - Ø720	55Lt/min - 80Lt/min	1+N	≥ 40 Cv	L=100cm P=130cm H=150cm	245 Kg.
500 Lt.	Ø620 - Ø720	55Lt/min - 80Lt/min	1+N	≥ 50 Cv	L=115cm P=145cm H=135cm	265 Kg.
600 Lt.	Ø620 - Ø720	55Lt/min - 80Lt/min	1+N	≥ 50 Cv	L=115cm P=145cm H=150cm	270 Kg.

Follow Us

OSELLA & C srl
Via Vittoria n°2 26038 Torre de' Picenardi (CR) TEL. +390375-394105
E-mail: info@osellasrl.it website: www.osellasrl.it