



THE BEST SOLUTION FOR AGRICULTURE

MISTBLOWER ATM OSPL

TECHNICAL FEATURES:

- HOT GALVANISED FRAME
- POLYETHYLENE TANK
- HAND WASHING TANK
- INTEGRATED SYSTEM CLEANING TANK
- DIAPHRAGM PUMP WITH VALVE
- REMOTE CONTROLLED PRESSURE REGULATOR
- HYDRAULIC AGITATOR
- SUCTION FILTER WITH ANTI-EMPTYING VALVE
- Ø 620 24" FAN WITH CENTRIFUGAL CLUTCH
- 9 ADJUSTABLE BLADES IN FIBREGLASS/NYLON
- TRANSMISSION WITH NEUTRAL
- STRAIGHTENING VANES
- 12 DOUBLE NOZZLES
- REAR BUMPER PROTECTION

SUITABLE FAN: Ø 720 -28"



www.osellasrl.it

ACCESSORIES ON REQUEST



ELECTRIC PRESS. REGUL.



HYDR. POWDER MIXER ASSEMBLY ON THE FILTER



TANK RINSING NOZZLE KIT



LIGHTING LED KIT



LOW VOLUME KIT





ADJUSTABLE DOUBLE ANTIDRIP BRASS NOZZLES

Mistblower brought to the third point, suitable for treatments on crops with small/medium planting density. Thanks to its compact size and high-performance fan, it can be used for the precise treatments on vineyards, uniform and symmetrical of espalier cultivation both in hilly and plain areas. The new ATM OSPL line boasts a tank with modern lines that incorporates in its compact shape the system washer and washbasin tanks, an innovative solid frame and quality components.

Fitted with 620- and 720-mm fan made entirely in Italy.

Advantages are targeted distribution, increased vegetation penetration, excellent symmetry of the treatment, considerable reduction of drift obtaining a quality treatment. The 9 fan blades are in composite material and can be adjusted in three different angles to adapt the unit at the power of the available tractor. The linear fans are equipped as standard with a metal clutch with a ferodo and a fixed rectifier at the air outlet that provides for a better air distribution. About groups are fitted with multipliers at a neutral speed and point.

Mistblowers are configurable with a wide range of high-pressure pumps. Available in the 400, 500, 600 litre version

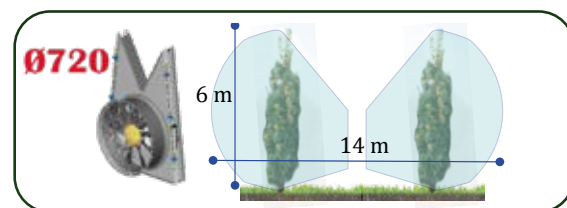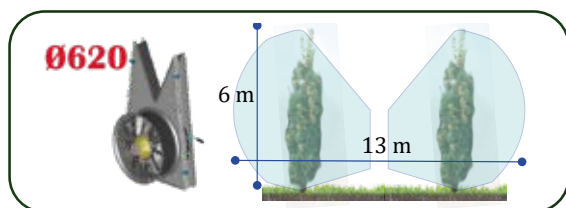

						
200 Lt.	Ø620	55Lt/min	1+N	≥ 40 Cv	L=90cm P=120cm H=130cm	195 Kg.
300 Lt.	Ø620	55Lt/min	1+N	≥ 40 Cv	L=100cm P=130cm H=130cm	205 Kg.
400 Lt.	Ø620 - Ø720	55Lt/min - 80Lt/min	1+N	≥ 40 Cv	L=100cm P=130cm H=150cm	245 Kg.
500 Lt.	Ø620 - Ø720	55Lt/min - 80Lt/min	1+N	≥ 50 Cv	L=115cm P=145cm H=135cm	265 Kg.
600 Lt.	Ø620 - Ø720	55Lt/min - 80Lt/min	1+N	≥ 50 Cv	L=115cm P=145cm H=150cm	270 Kg.



Follow Us



OSELLA & C srl
 Via Vittoria n°2 26038 Torre de' Picenardi (CR) TEL. +390375-394105
 E-mail: info@osellasrl.it website: www.osellasrl.it