

OSELLA

THE BEST SOLUTION FOR AGRICULTURE

MISTBLOWER ATMTC

TECHNICAL FEATURES:

- HOT GALVANISED FRAME
- POLYETHYLENE TANK
- HAND WASHING TANK
- INTEGRATED SYSTEM CLEANING TANK
- DIAPHRAGM PUMP WITH VALVE
- REMOTE CONTROLLED PRESSURE REGULATOR
- HYDRAULIC AGITATOR
- SUCTION FILTER WITH ANTI-EMPTYING VALVE
- 11ORIENTATING CHECK VALVE NOZZLES
- Ø 450 AIR CONVEYOR
- 2 WHEELS
- 2 SPEEDS
- TRANSMISSION WITH NEUTRAL
- CLUTCH
- HYDR. HORIZONTAL MOVEMENT 90°
- DEFLECTORS
- REAR BUMPER PROTECTION

HORIZONTAL RANGE MT. 45

VERTICAL RANGE MT. 27

POWER ABSORPTION 100 HP



www.osellasrl.it

ACCESSORIES ON REQUEST



ELECTRIC PRESS. REGUL.



HYDR. POWDER MIXER ASSEMBLY ON THE FILTER




TANK RINSING NOZZLE KIT



LIGHTING LED KIT




KIT TREE TRUNK TREATMENT

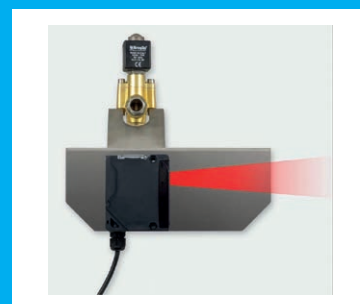

PHOTOCELL KIT

Quality towed Mistblower suitable for treatments on trees and in open fields. Thanks to its small size, excellent manoeuvrability, and high performance, hydraulically tiltable fan, it can be used for the optimal treatments on poplars with an excellent range/power ratio. The new towed Mistblower is complete with circuit washer and washbasin integrated in the main tank, a frame with attention to detail to be reliable, manageable, and productive. Possibility of installation with multiple components including steering rudders, hydraulics, and computers. Fan assemblies can be single or double impeller with double speed multipliers and neutral point and centrifugal clutch. The dual impeller model can be fitted with a diffuser kit for excellent and precise treatment at the base of the trunk and an optical reader that greatly simplifies and speeds up the work, automatically detecting the trunk and dispensing the product independently.

Mistblowers are configurable with a wide range of high-pressure pumps. Available in the 1000, 1500, 2000, 3000 litre version

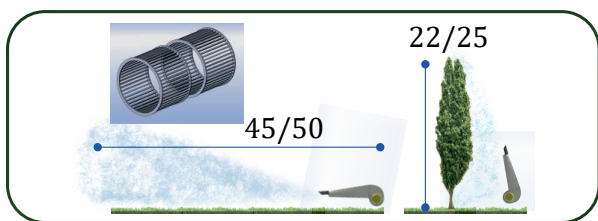

1000 Lt.	Ø450	n°2	116Lt/min	2+N	≥ 90 Cv	L=120cm P=283cm H=275cm	630 Kg.
1500 Lt.	Ø450	n°2	116Lt/min	2+N	≥ 90 Cv	L=130cm P=315cm H=284cm	700 Kg.
2000 Lt.	Ø450	n°2	116Lt/min - 150Lt/min	2+N	≥ 90 Cv	L=155cm P=330cm H=285cm	733 Kg.
3000 Lt.	Ø450	n°2	150Lt/min - 170Lt/min	2+N	≥ 90 Cv	L=182cm P=357cm H=286cm	1120 Kg.



Follow Us



OSELLA & C srl
 Via Vittoria n°2 26038 Torre de' Picanardi (CR) TEL. +390375-394105
 E-mail: info@osellasrl.it website: www.osellasrl.it