

OSELLA

THE BEST SOLUTION FOR AGRICULTURE

MISTBLOWER ATMTP

TECHNICAL FEATURES:

- HOT GALVANISED FRAME
- POLYETHYLENE TANK
- HAND WASHING TANK
- INTEGRATED SYSTEM CLEANING TANK
- WHEELS WITH ADJUSTABLE AXLE
- OUTSIDE SUCTION FILTER WITH VALVE
- DIAPHRAGM PUMP WITH VALVE
- REMOTE CONTROLLED PRESSURE REGULATOR
- HYDRAULIC AGITATOR
- Ø 820- 920-1060 FAN
- 9 ADJUSTABLE BLADES IN FIBREGLASS/NYLON
- 14 ORIENTATING CHECK VALVE NOZZLES
- CLUTCH
- 2 SPEEDS
- TRANSMISSION WITH NEUTRAL
- DEFLECTOR
- PROTECTIONS



www.osellasrl.it

ACCESSORIES ON REQUEST



ELECTRIC PRESS. REGUL.




HYDR. POWDER MIXER ASSEMBLY ON THE FILTER



TANK RINSING NOZZLE KIT



LIGHTING LED KIT

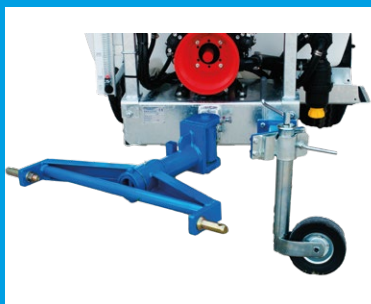


STEERING SHAFT



BRAVO 180S COMPUTER

Quality towed Mistblower suitable for treatments on crops with medium/large planting density. Thanks to its small size, excellent manoeuvrability, and high-performance fan, it can be used for the precise treatments on awning vineyards, orchards, olive groves and nursery crops. The new towed Mistblower is complete with circuit washer and washbasin integrated in the main tank, a frame with attention to detail to be reliable, manageable, and productive. Possibility of installation with multiple components including steering rudders, hydraulics, and computers. Fitted with 620- and 820-mm fan made entirely in Italy. The 9 fan blades are made in composite material and they can be adjusted in three different angles to adapt the unit to the tractor available. The fans can be fitted with a metal centrifugal clutch with ferodo. Groups are fitted with multipliers at a neutral speed and point.

Mistblowers are configurable with a wide range of high-pressure pumps. Available in the 1000, 1500, 2000, 3000 litre version

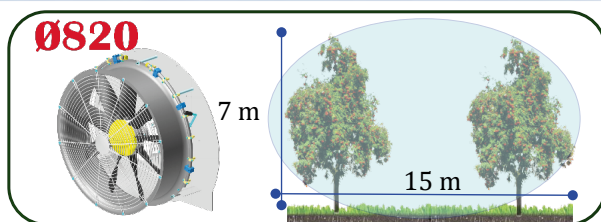

600Lt.	Ø720 - Ø820	105Lt/min - 116Lt/min	2+N	≥ 45 Cv	L=100cm P=230cm H=125cm	375 Kg.
800 Lt.	Ø720 - Ø820	105Lt/min - 116Lt/min	2+N	≥ 45 Cv	L=110cm P=250cm H=130cm	420 Kg.
1000 Lt.	Ø820	116Lt/min	2+N	≥ 60 Cv	L=120cm P=273cm H=138cm	590 Kg.
1500 Lt.	Ø820	116Lt/min	2+N	≥ 60 Cv	L=130cm P=305cm H=144cm	660 Kg.
2000 Lt.	Ø820	116Lt/min - 150Lt/min	2+N	≥ 70 Cv	L=155cm P=320cm H=164cm	696 Kg.
3000 Lt.	Ø820	150Lt/min - 170Lt/min	2+N	≥ 80 Cv	L=182cm P=347cm H=185cm	1080 Kg.



Follow Us



OSELLA & C srl
 Via Vittoria n°2 26038 Torre de' Picenardi (CR) TEL. +390375-394105
 E-mail: info@osellasrl.it website: www.osellasrl.it